


Standard DIP IC Sockets

RM=2.54
contact: CuSn, -55°C to +110°C

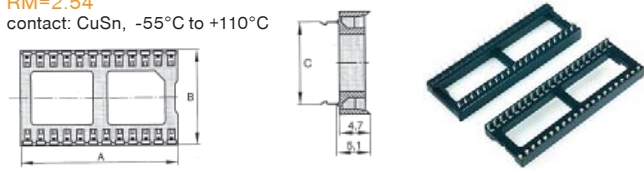


Part No.	Socket	A [mm]	B [mm]	C [mm]
ECLC 06	6-pins	7,54	10,08	7,62
ECLC 08	8-pins	10,08	10,08	7,62
ECLC 14	14-pins	17,70	10,08	7,62
ECLC 16	16-pins	20,24	10,08	7,62
ECLC 18	18-pins	22,78	10,08	7,62
ECLC 20	20-pins	25,32	10,08	7,62
ECLC 24-3	24-pins, slim	30,40	10,08	7,62
ECLC 24-6	24-pins, wide	30,40	17,70	15,24
ECLC 28-3	28-pins, slim	35,48	17,70	15,24
ECLC 28-6	28-pins, wide			15,24
ECLC 32	32-pins, wide	40,56	17,70	15,24
ECLC 40	40-pins	50,72	17,70	15,24

Part No.	Packing	Ord. No.
S ECLC 06	80pcs	30602
S ECLC 08	60pcs	30603
S ECLC 14	34pcs	30604
S ECLC 16	30pcs	30605
S ECLC 18	26pcs	30606
S ECLC 20	24pcs	30607
S ECLC 24-3	20pcs	30608
S ECLC 24-6	20pcs	30609
S ECLC 28-6	17pcs	30610
S ECLC 32-6	15pcs	30611
S ECLC 40	12pcs	30612
S ECLC 28-3	17pcs	40913

Precision DIP IC Sockets

RM=2.54
contact : gold plated
-55°C to +125°C

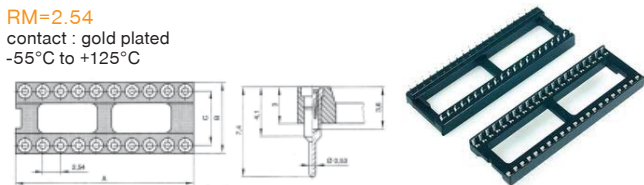


Part No.	Socket	A [mm]	B [mm]	C [mm]
ECPF06	6-pins	7,54	10,08	7,62
ECPF08	8-pins	10,08	10,08	7,62
ECPF14	14-pins	17,70	10,08	7,62
ECPF16	16-pins	20,24	10,08	7,62
ECPF18	18-pins	22,78	10,08	7,62
ECPF20	20-pins	25,32	10,08	7,62
ECPF24-3	24-pins, slim	30,40	10,08	7,62
ECPF24-6	24-pins, wide	30,40	17,70	15,24
ECPF28-3	28-pins, slim	35,48	10,08	7,62
ECPF28-6	28-pins, wide	35,48	17,70	15,24
ECPF32	32-pins	40,56	17,70	15,24
ECPF40	40-pins	50,72	17,70	15,24

Part No.	Packing	Ord. No.
S ECPF06	80pcs	33172
S ECPF08	60pcs	33173
S ECPF14	33pcs	33174
S ECPF16	29pcs	33175
S ECPF18	26pcs	33176
S ECPF20	23pcs	33177
S ECPF24-3	19pcs	33178
S ECPF24-6	19pcs	33179
S ECPF28-6	16pcs	33180
S ECPF32	15ks	33181

S ECPF40	11ks	33182
S ECPF28-3	16ks	40503

PLCC IC Sockets

-55°C to +125°C



Part No.	Socket	A [mm]	B [mm]	C [mm]
PLCC 28	28-pins	7,62	18,2	20,70
PLCC 32	32-pins	7,62	18,7	22,70
PLCC 44	44-pins	12,70	23,5	28,40
PLCC 52	52-pins	15,24	26,00	32,70
PLCC 68	68-pins	20,32	32,00	38,20
PLCC 84	84-pins	25,40	36,70	45,40

Part No.	Packing	Ord. No.
S PLCC 20	37pcs	40914
S PLCC 32	28pcs	24771
S PLCC 44	25pcs	22502
S PLCC 52	22pcs	24772
S PLCC 68	18pcs	20383
S PLCC 84	16pcs	20384

IC Sockets PLCC SMD

-55°C to +125°C



Part No.	Socket	A [mm]	B [mm]	C [mm]
PLCC 20 SMD	20-pins	5,08	15,58	16
PLCC 28 SMD	28-pins	7,62	18,12	20,6
PLCC 32 SMD	32-pins	7,62	18,12	22,5
PLCC 44 SMD	44-pins	12,7	23,2	27,5
PLCC 52 SMD	52-pins	15,24	25,74	31,1
PLCC 68 SMD	68-pins	20,32	30,82	38,8
PLCC 84 SMD	84-pins	25,4	25,9	44,8

Part No.	Packing	Ord. No.
S PLCC 20 SMD	37pcs	30569
S PLCC 28 SMD	32pcs	30570
S PLCC 32 SMD	28pcs	30571
S PLCC 44 SMD	26pcs	40915
S PLCC 52 SMD	20pcs	30573
S PLCC 68 SMD	19pcs	30574
S PLCC 84 SMD	16pcs	30575

Test (ZIF) Sockets



Good quality wide slot universal ZIF (Zero Insertion Force) socket.

Using the ZIF socket allows quick and easy insertion of devices like PIC chips for programming without any possibility of leg damage. Simply flick the integral lever to clamp the pins for programming and lift again to release the device.

Part No.	Socket	A	B	C	Z	P
TEX 24	24-pins	45,30	40,90	22,90	11,00	15,24
TEX 28	28-pins	50,40	46,00	22,90	13,00	15,24
TEX 40	40-pins	65,60	61,20	22,90	19,00	15,24

Part No.	Ord. No.
S TEX 24	13334
S TEX 28	13335
S TEX 40	13336